


Dehumidifier

DH 751



FUNCTIONING PRINCIPLES

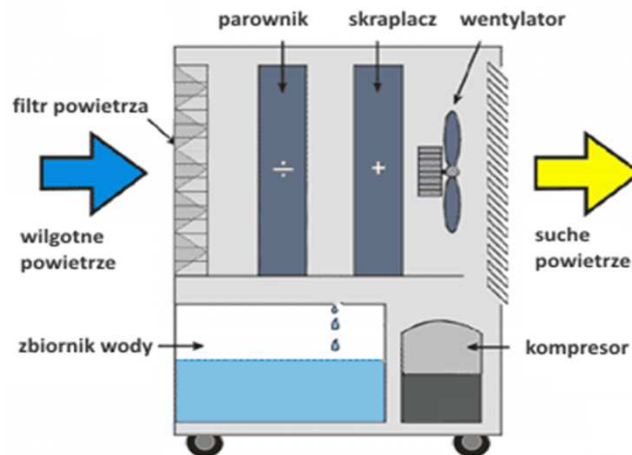

This dehumidifier controls humidity by forcing excess moisture to condense from the air into the unit as it passes over the cooling elements. Contact with this cold surface causes the moisture in the air to condense. This condensed water then drains safely into the water tank. The dried air then passes through a warmed coil where it is slightly warmed and reenters the room at a slightly elevated temperature.

TECHNICAL DATA

Capacity (30°C/80%Rh)	l/24h	46,7	Refrigerant	R407C
Working range	°C / %Rh	5-35 / 35-90	Refrigerant mass	370 g
Net weight	kg	30	Tank capacity	5,7 l
Gross weight	kg	36	Power supply	~220-240 V
Noise level	dBa	52	Frequency	50 Hz
Air flow	m³/h	350	Rated current	4,2 A
			Power consumption	900 W

PACKING

Dimensions packing	mm	610x405x660
Dimensions utilization	mm	580x422x820
Pieces per Euro-pallet	n°	12
Pieces per truck 80m ³	n°	384

COMPONENTS

Compressor	rotary
Fan	centrifugal
Water tank	5,7 l
Defrosting system	air flow
Hygrostat	manual
Counter meter	absence
Others	-

ACCESSORIES

Water pump	4512.405
------------	----------

WIRING DIAGRAM

